



Conduit can be used to support duct sizes over 48" or smaller duct in high pressure applications. Dyn-O-Locs insert into the hollow ends of conduit to provide a means of attaching the conduit to the duct.

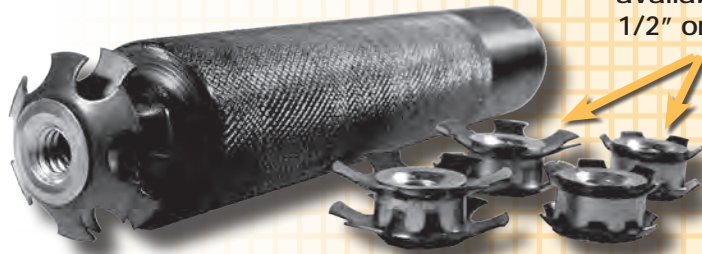

Dyn-O-Locs are available for use with 1/2" or 3/4" Conduit.

**Dyn-O-Claw
now available!**

The Dyn-O-Claw is designed to join conduits for more stability and to eliminate their vibration in the duct



14 gauge galvanized steel


Easier and faster than other alternatives such as ties or welding

Item #	Code	Description	Pkg.	Weight (lbs.)
21088	DOMDOC12	1/2" Dyn-O-Claw	250/Box	40
21089	DOMDOC34	3/4" Dyn-O-Claw	200/Box	40

The Dyn-O-Loc Tool aids installation and assures accurate spacing.




Large self-sealing washer



Long bolt for easier installation

We put the washer on the bolt, so you don't have to!

Installed lock is pull tested to withstand over 1900 lbs.



Ordering Information

Item #	Code	Description	Quantity
21097	DOMRL12	1/2" Dyn-O-Loc	250/Box
21098	DOMRL34	3/4" Dyn-O-Loc	250/Box
21076	RLT	Dyn-O-Loc Tool	1 each