



High Head Pro Point Screws

Available in 8 x 3/4, 10 x 3/4 and 10 x 1-1/2.



Serrated Edge to prevent the backing out of the screw.

Highest head in the industry.

Higher Head stays in chuck with ease.

Zinc-plated.

Precision formed drill point for faster penetration with less effort.

Thread is designed to propel the screw through steel with no strip-out.

For use on steel up to 3/16" thick.

Sharp, non-walking point.

Heavy Duty Screws for Heavy Gauge!

ORDERING INFORMATION

ITEM SIZE	DRIVER SIZE	DRILL PT. SIZE	MAX. DRILL CAPABILITY		HUNDRED PACK (PPC) ITEM#	FIVE HUNDRED PACK (PPF) ITEM #	THOUSAND PACK (PPT) ITEM#	BULK PACK (PPB)	
			DEC.	GA.				ITEM#	QTY.
10 x 3/4	5/16	3	.175	7	14208	14204	14210	15196	5M
8 x 3/4	1/4	2	.100	12	14207	N/A	14209	15210	10M
10 X 1-1/2	5/16	3	.175	7	N/A	N/A	14205	15173	2M




© Duro Dyne Corp.
Printed in USA 7/14
BC007001



High Head Saber Screws

High Head Saber Screw vs. standard screw

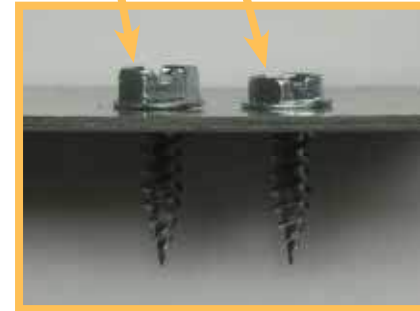

Slotted for easy removal with standard flat driver.

Higher head stays in chuck with ease and provides stability during insertion.

Serrated Edge to prevent the backing out of the screw.

Thread is designed to pull the screw through steel with no strip-out.

Pierces through heavier gauges of steel.

Heavy zinc-plating for strong corrosion resistance.

No metal filings to clog drill chuck.

Super sharp, specially hardened, non-walking point.

Precision formed point for constant performance.

ORDERING INFORMATION

ITEM SIZE	DRIVER SIZE	HUNDRED PACK (SAC) ITEM#	250 PACK (SAQ) ITEM#	500 PACK (SAF) ITEM#	THOUSAND PACK (SAT) ITEM#	PAIL (SAP)		BULK PACK (SAB)	
						ITEM#	QTY.	ITEM#	QTY.
10 3/4	5/16"	14232	14233	14234	14235	15121	3,000	15122	5,000
10 3/4	1/4"	14236	14237	14238	14239	15119	3,000	15120	5,000



© Duro Dyne Corp.
Printed in USA 1/14
BC007000