
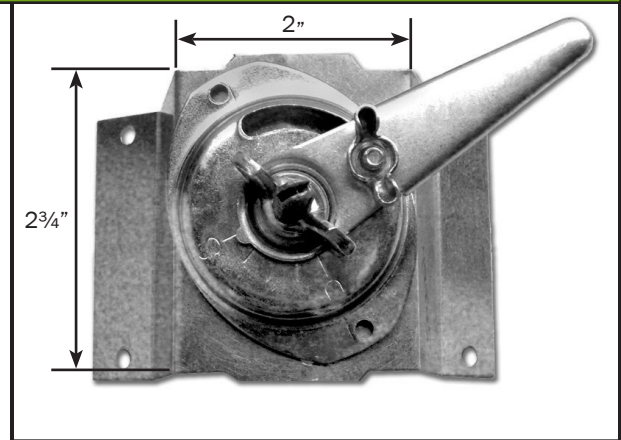


# Appendix B - 1 1/2" or 2" Stand-Off

## Appendix C \* Stand-Off Hardware

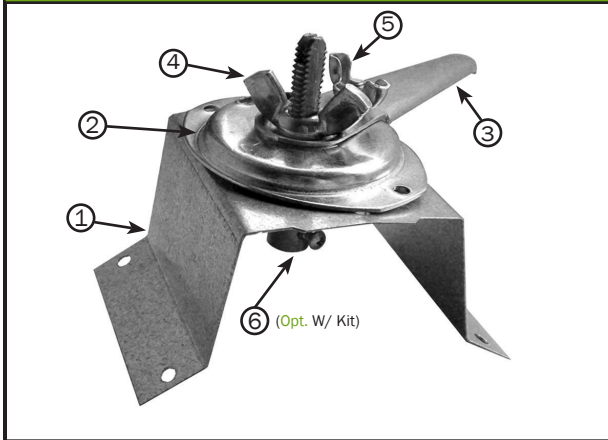

## Stand-Off Hardware Components

1. **Stand-Off Bracket** - Available in 1 1/2" and 2". 26 Gauge G-60 Galvanized Steel.
2. **1/4 Turn Dial Regulator** - 20 Gauge G-60 Galvanized Steel
3. **Damper Handle** - 20 Gauge G-60 Galvanized Steel.
4. **Wing Nut** - 5/16" Zinc Coated Wing Nut.
5. **Handle Lock Wing Nut** - Galvanized (used to lock handle in desired position)
6. **Shaft Extension (Optional w/Kit)** - Zinc-Aluminum Cast Alloy with 5/16"-18 UNC-1A Threads and a 1/8" Set Screw. Supplied with Stand-Off Kits listed below.

**Note:**



All Galvanized Steel Components Meet ASTM A653 and A924.  
All G-60 Galvanized Coating Meets ASTM A653 and A90.

## Part Numbers

Stand-Off Kits (Available for Retrofit. 50/Cartron):

- |                 |  |
|-----------------|--|
| <b>SDRKIT15</b> | 1 1/2" Stand-Off Kit (Includes Items 1-6 Listed Above) |
| <b>SDRKIT2</b>  | 2" Stand-Off Kit (Includes Items 1-6 Listed Above)     |

## Metal 3/8" Rod Damper & Stand-off Hardware Specs

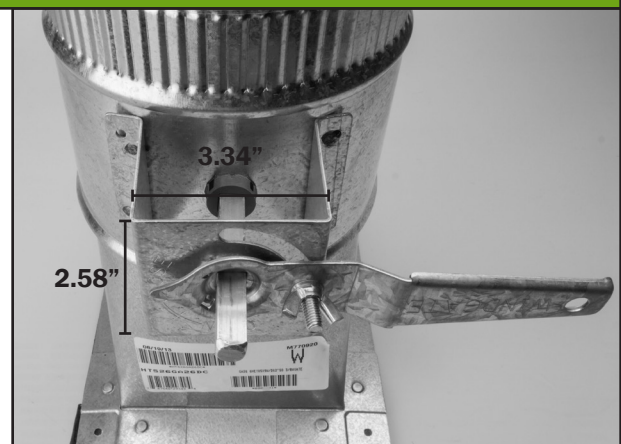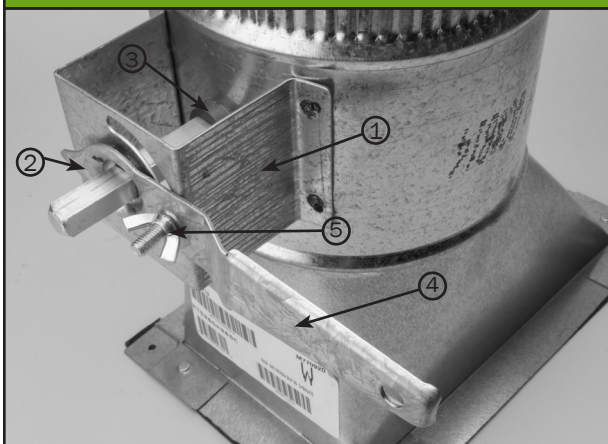

## Metal 3/8" Rod Damper & Stand-off Hardware Components

1. **Standoff** - Available in 1 1/2" and 2" Galvanized Steel
2. **3/8" Dial Regulator** - 18 Gauge Galvanized Steel
3. **3/8" Bushing** - Cast resin
4. **Handle** - 16 Gauge Galvanized Steel
5. **Handle Lock Wing Nut** - Forged Steel Wing Nut