


USC Universal Strut Clamp for Pipe/Conduit



- Consists of two clamps, nut and bolt
- Fits into open side of strut channel
- Conforms with Manufacturers Standardization Society (MSS) SP-58 (Type 59)

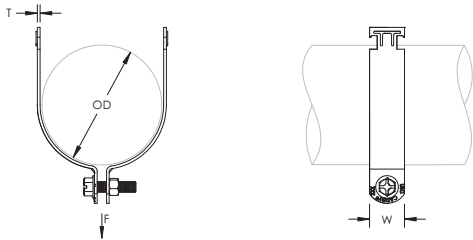

Material: Steel

Part Number	Outer Diameter OD	Pipe Size	EMT Conduit Size	Width W	Thickness T	Static Load F
Finish: Electrogalvanized						
USC006EG	0.25"	-	-	1 1/4"	16 GA	450 lb
USC010EG	0.38"	-	-	1 1/4"	16 GA	450 lb
USC013EG	0.50" – 0.54"	-	-	1 1/4"	16 GA	450 lb
USC016EG	0.58" – 0.63"	-	3/8"	1 1/4"	16 GA	450 lb
USC017EG	0.65" – 0.70"	3/8"	-	1 1/4"	16 GA	450 lb
USC020EG	0.71" – 0.79"	-	1/2"	1 1/4"	16 GA	450 lb
USC021EG	0.81" – 0.84"	1/2"	-	1 1/4"	16 GA	450 lb
USC022EG	0.85" – 0.88"	-	-	1 1/4"	16 GA	450 lb
USC025EG	0.92" – 1.00"	-	3/4"	1 1/4"	16 GA	450 lb
USC026EG	1.00" – 1.06"	3/4"	-	1 1/4"	16 GA	450 lb
USC028EG	1.10" – 1.14"	-	-	1 1/4"	16 GA	450 lb
USC031EG	1.16" – 1.26"	-	1"	1 1/4"	16 GA	450 lb
USC033EG	1.29" – 1.32"	1"	-	1 1/4"	16 GA	450 lb
USC036EG	1.33" – 1.50"	-	-	1 1/4"	14 GA	600 lb
USC040EG	1.51" – 1.60"	-	1 1/4"	1 1/4"	14 GA	600 lb
USC042EG	1.63" – 1.67"	1 1/4"	-	1 1/4"	14 GA	600 lb
USC046EG	1.69" – 1.77"	-	1 1/2"	1 1/4"	14 GA	600 lb
USC048EG	1.87" – 1.97"	1 1/2"	-	1 1/4"	14 GA	600 lb
USC053EG	1.98" – 2.11"	-	-	1 1/4"	12 GA	850 lb
USC054EG	2.12" – 2.17"	-	-	1 1/4"	12 GA	850 lb
USC058EG	2.20" – 2.25"	-	2"	1 1/4"	12 GA	850 lb
USC060EG	2.34" – 2.45"	2"	-	1 1/4"	12 GA	850 lb
USC063EG	2.45" – 2.54"	-	-	1 1/4"	12 GA	850 lb



Part Number	Outer Diameter OD	Pipe Size	EMT Conduit Size	Width W	Thickness T	Static Load F
USC068EG	2.60" – 2.72"	-	-	1 1/4"	12 GA	850 lb
USC073EG	2.75" – 2.88"	2 1/2"	2 1/2"	1 1/4"	12 GA	850 lb
USC076EG	2.96" – 3.00"	-	-	1 1/4"	12 GA	850 lb
USC080EG	3.04" – 3.25"	-	-	1 1/4"	12 GA	850 lb
USC086EG	3.31" – 3.50"	3"	3"	1 1/4"	12 GA	850 lb
USC093EG	3.54" – 3.75"	-	-	1 1/4"	12 GA	850 lb
USC101EG	3.87" – 4.04"	3 1/2"	3 1/2"	1 1/4"	12 GA	850 lb
USC107EG	4.10" – 4.33"	-	-	1 1/4"	12 GA	850 lb
USC113EG	4.37" – 4.54"	4"	4"	1 1/4"	12 GA	850 lb
USC121EG	4.63" – 4.87"	-	-	1 1/4"	12 GA	850 lb
USC129EG	5.00" – 5.13"	-	-	1 1/4"	12 GA	850 lb
USC135EG	5.25" – 5.37"	-	-	1 1/4"	12 GA	850 lb
USC143EG	5.50" – 5.75"	5"	-	1 1/4"	11 GA	900 lb
USC152EG	5.87" – 6.10"	-	-	1 1/4"	11 GA	900 lb
USC159EG	6.13" – 6.38"	-	-	1 1/4"	11 GA	900 lb
USC168EG	6.50" – 6.75"	6"	-	1 1/4"	11 GA	900 lb
USC178EG	6.87" – 7.13"	-	-	1 1/4"	11 GA	900 lb
USC191EG	7.50"	-	-	1 1/4"	11 GA	900 lb
USC200EG	7.75" – 8.00"	-	-	1 1/4"	11 GA	900 lb
USC208EG	8.04" – 8.37"	-	-	1 1/4"	11 GA	900 lb
USC218EG	8.50" – 8.63"	8"	-	1 1/4"	11 GA	900 lb
USC228EG	8.86" – 9.10"	-	-	1 1/4"	11 GA	900 lb
USC254EG	9.84" – 10.13"	-	-	1 1/4"	11 GA	900 lb
USC277EG	10.70" – 11.02"	10"	-	1 1/4"	11 GA	900 lb
USC311EG	12.00" – 12.48"	-	-	1 1/4"	11 GA	900 lb
USC324EG	12.75"	12"	-	1 1/4"	11 GA	900 lb
USC400EG	15.75"	-	-	1 1/4"	11 GA	900 lb
Finish: Hot-Dip Galvanized						
USC016HD	0.58" – 0.63"	-	3/8"	1 1/4"	16 GA	450 lb
USC017HD	0.65" – 0.70"	3/8"	-	1 1/4"	16 GA	450 lb
USC020HD	0.71" – 0.79"	-	1/2"	1 1/4"	16 GA	450 lb
USC021HD	0.81" – 0.84"	1/2"	-	1 1/4"	16 GA	450 lb
USC025HD	0.92" – 1.00"	-	3/4"	1 1/4"	16 GA	450 lb
USC026HD	1.00" – 1.06"	3/4"	-	1 1/4"	16 GA	450 lb
USC031HD	1.16" – 1.26"	-	1"	1 1/4"	16 GA	450 lb
USC033HD	1.29" – 1.32"	1"	-	1 1/4"	16 GA	450 lb
USC040HD	1.51" – 1.60"	-	1 1/4"	1 1/4"	14 GA	600 lb
USC042HD	1.63" – 1.67"	1 1/4"	-	1 1/4"	14 GA	600 lb
USC046HD	1.69" – 1.77"	-	1 1/2"	1 1/4"	14 GA	600 lb
USC048HD	1.87" – 1.97"	1 1/2"	-	1 1/4"	14 GA	600 lb
USC054HD	2.12" – 2.17"	-	-	1 1/4"	12 GA	850 lb
USC058HD	2.20" – 2.25"	-	2"	1 1/4"	12 GA	850 lb
USC060HD	2.34" – 2.45"	2"	-	1 1/4"	12 GA	850 lb
USC073HD	2.75" – 2.88"	2 1/2"	2 1/2"	1 1/4"	12 GA	850 lb
USC086HD	3.31" – 3.50"	3"	3"	1 1/4"	12 GA	850 lb
USC101HD	3.87" – 4.04"	3 1/2"	3 1/2"	1 1/4"	12 GA	850 lb
USC113HD	4.37" – 4.54"	4"	4"	1 1/4"	12 GA	850 lb
USC143HD	5.50" – 5.75"	5"	-	1 1/4"	11 GA	900 lb
USC168HD	6.50" – 6.75"	6"	-	1 1/4"	11 GA	900 lb



Part Number	Outer Diameter OD	Pipe Size	EMT Conduit Size	Width W	Thickness T	Static Load F
USC218HD	8.50" – 8.63"	8"	–	1 1/4"	11 GA	900 lb
USC277HD	10.70" – 11.02"	10"	–	1 1/4"	11 GA	900 lb
USC324HD	12.75"	12"	–	1 1/4"	11 GA	900 lb

WARNING

Pentair products shall be installed and used only as indicated in Pentair's product instruction sheets and training materials. Instruction sheets are available at erico.pentair.com and from your Pentair customer service representative. Improper installation, misuse, misapplication or other failure to completely follow Pentair's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2017 Pentair All rights reserved
 Pentair, CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH and LENTON are owned by Pentair or its global affiliates.
 All other trademarks are the property of their respective owners. Pentair reserves the right to change specifications without prior notice.

