

SUBMITTAL RECORD \_\_\_\_\_  
 JOB \_\_\_\_\_  
 LOCATION \_\_\_\_\_  
 SUBMITTED TO \_\_\_\_\_  
 SUBMITTAL PREPARED BY \_\_\_\_\_  
 APPROVED BY \_\_\_\_\_  
 DATE \_\_\_\_\_



# Submittal Form

## DN, UVDN

### Dyn-O-Ties


### DESCRIPTION

Whenever your job calls for securing round flexible duct to outlets, pipes or fittings, you can do the job better, faster, and at a lower cost using DYN-O-TIES™, flexible duct ties. DYN-O-TIES, when properly installed, provide a secure connection of flexible duct listed by Underwriters Laboratories Inc., class 1.


Duro Dyne also offers two sizes of UV DYN-O-TIES that are made to resist Ultraviolet rays and adverse weather conditions when used in outdoor applications.

### STORAGE

To ensure superior performance, nylon cable tie products should be stored in a sealed polyethylene bag at room temperature in at least 50% humidity (recommended 80% RH). Limit the exposure of unused cable ties to extreme heat and cold. Should cable ties be exposed to extreme temperatures and/or extreme relative humidity, store at room temperature and at least 50% humidity (recommended 80% RH) for at least 24 hrs in a sealed bag prior to further use.

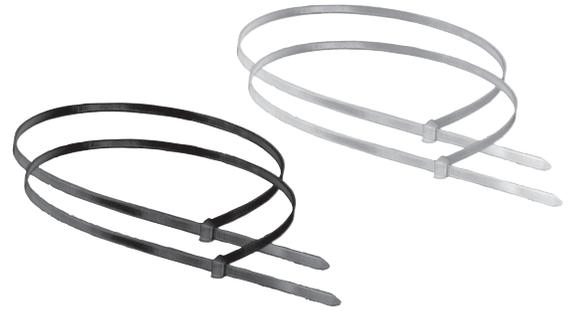

NYLON
6/6 V2 – available in five sizes
Self-extinguishing
Fungus inert
Normal service temp. range: – 40° F to 185° F
Test Results*: Nylon -175 lbs-

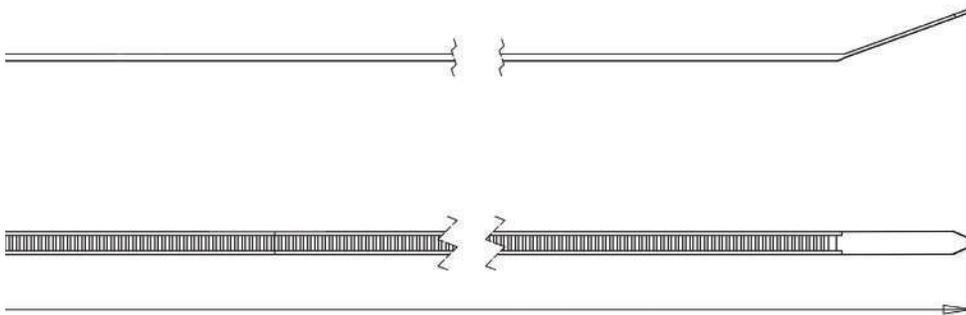

181B-C 13ER  
MH19757

For use with UL nonmetallic  
airducts and air connectors

\*Note: Ties are tested to CSA C22.2NO.18.5-02 / UL 1565. Test Method: Tie is secured at both ends forming a loop. A weight is suspended from the bottom of loop to determine tensile strength of DYN-O-TIE strap.

ITEM #	CODE	DESCRIPTION	COLOR	LENGTH	MAX. DIA.	PACKAGING	PKG./CTN
8251	DN24	Nylon - USA Made	White	24"	6"	25	20
8322	DN36	Nylon - USA Made	White	36"	11"	50	10
8312	DNC36	Nylon - USA Made	White	36"	11"	100	5
8323	DN48	Nylon - USA Made	White	48"	14"	50	10
8262	DNX60	Nylon - USA Made	White	60"	18"	50	10
7002	UVDN48	UV Resistant Nylon - Imported	Black	48"	14"	50	10
7003	UVDN36	UV Resistant Nylon - Imported	Black	36"	11"	50	10
8311	DN36	Nylon - USA Made	White	36"	11"	25	20
8305	DN48	Nylon - USA Made	White	48"	14"	25	20
7004	DN36N	Nylon - Imported	White	36"	11"	50	10
7005	DN48N	Nylon - Imported	White	48"	14"	50	10

Duro Dyne East Division, Bay Shore, NY 631-249-9000 Fax: 631-249-8346  
 Duro Dyne Midwest Division, Fairfield, OH 513-870-6000 Fax: 513-870-6005  
 Duro Dyne West Division, Fontana, CA 562-926-1774 Fax: 562-926-5778  
 Duro Dyne Canada, Lachine, Quebec, Canada 514-422-9760 Fax: 514-636-0328  
 www.durodyne.com E-mail: durodyne@durodyne.com



©2014 Duro Dyne Corporation  
 Printed in USA 9/15  
 BO008410