




**Friction of Air in Straight Ducts to 6000 fpm* (30.5 m/sec)* for:
Spiracoustic Plus**

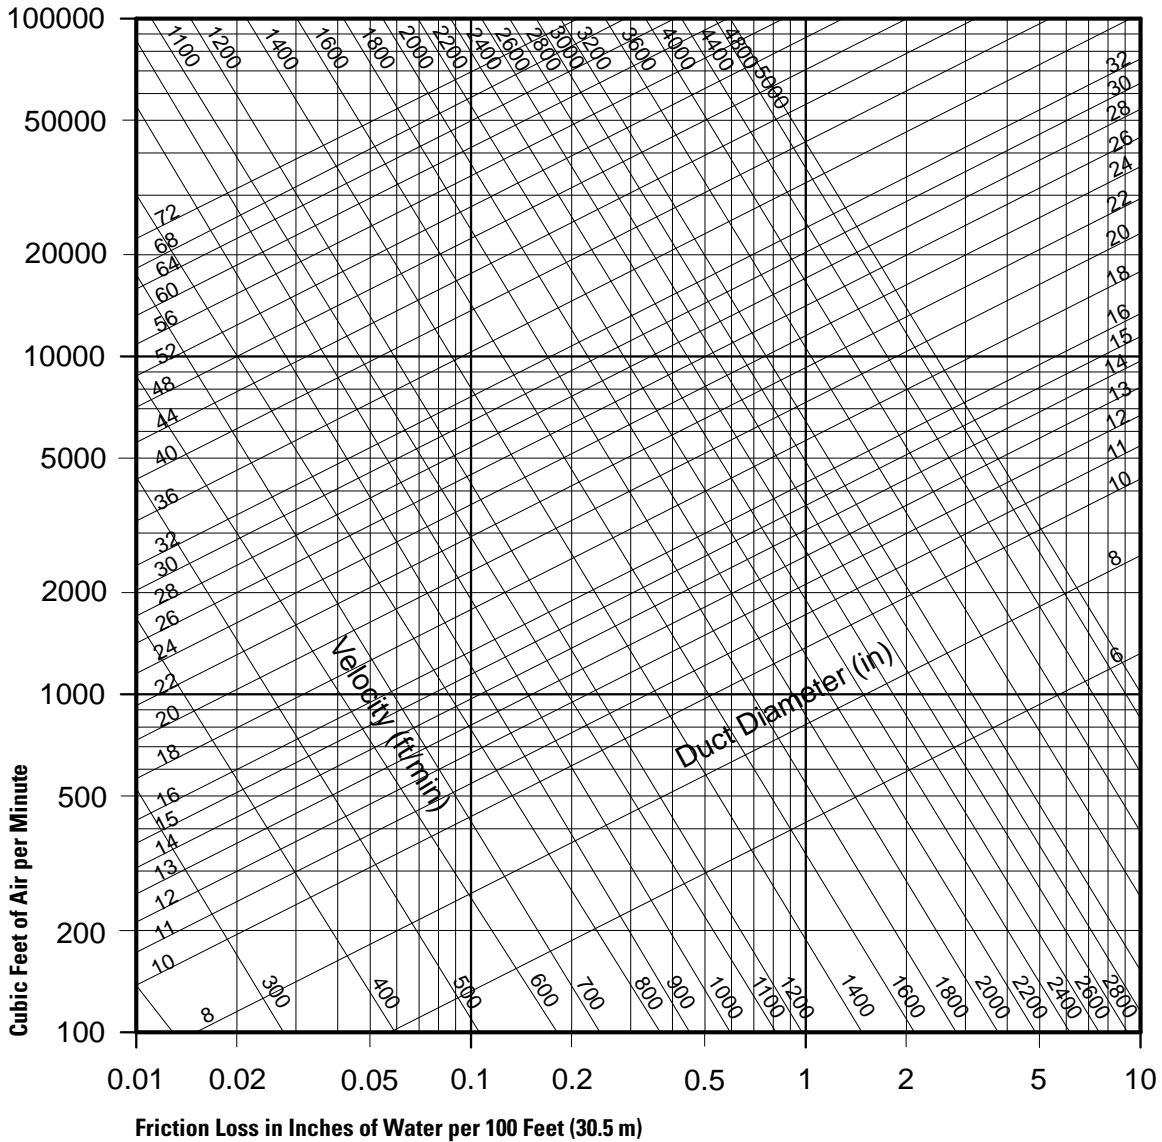

Air flow performance of straight ducts was tested following the test procedure of the NAIMA AHS-152 standard.

*Maximum operating velocity

Spiracoustic Plus™

Round Duct Liner Products



717 17th St.
Denver, CO 80202
(800) 654-3103
specJM.com

North American Sales Offices, Insulation Systems

Eastern Region
P.O. Box 158
Defiance, OH 43512
(800) 334-2399
Fax: (419) 784-7866

Western Region & Canada
P.O. Box 5108
Denver, CO 80217
(800) 368-4431
Fax: (303) 978-4661

The physical and chemical properties of Spiracoustic Plus™ Round Duct Liner Products represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Numerical flame spread and smoke developed ratings are not intended to reflect hazards presented by these or any other materials under actual fire conditions. Check with the Regional Sales Office nearest you to assure current information. **All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions including Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions, Limited Warranty and Limitation of Remedy, and information on other Johns Manville thermal insulations and systems, call (800) 654-3103.**