



OVERVIEW

Insta-Grip is an instant-tacking, solvent-based insulation adhesive engineered for spray booth applications. It's exceptional coverage and fast tack properties provides reduced labor and lower application costs.

PART NUMBERS

335501	(1) Case w/ (4) 1-Gallon Pails (Red)
335502	(1) 5-Gallon Pail (Red)
335507	(1) 50-Gallon Drum (Red)
335510	(1) Case w/ (4) 1-Gallon Pails (Black)
335509	(1) 5-Gallon Pail (Black)
335508	(1) 50-Gallon Drum (Black)

CLASSIFIED
C UL US

UNDERWRITERS LABORATORIES INC.®
CLASSIFIED
ADHESIVE

SURFACE BURNING CHARACTERISTICS 294U
*Applied to inorganic reinforced cement board

FLAME SPREAD 0
SMOKE DEVELOPED 0


*Tested as applied in two 3"-wide strips 8" on center at a coverage of 750 sq. ft./gal. Flash point of finished adhesive, closed cup; less than -10°C.

SPECIFICATION/STANDARDS COMPLIANCE

Property	Method	Results
Surface Burning Characteristics	UL 723	Pass
Duct Thermal Insulation	ASTM C916	Pass
NFPA	90A & 90B	Class 0

FEATURES AND BENEFITS

- Excellent Strength
- Exceptional Coverage
- Instant-Tacking
- Reduced Labor
- Lower Application Costs



**CONTRACTORS
GET REWARDED**


CarlisleHVACRewards.com

TYPICAL PROPERTIES AND CHARACTERISTICS

Consistency	Low-viscosity liquid
Base	Synthetic polymers and resins
Solvent	Aliphatic
Weight per Gallon	6.7 lbs.
Solids Content	32%
Viscosity	1,000 cps
Coverage	Up to 700 sq. ft./gal
Tack Time	Immediate
Open Time	Approximately 15 minutes
Service Temperature	-20°F – 200°F (-28.9°C – 93.3°C)
Surface Burning	Flame spread 0, Smoke developed 0, (When tested in accordance with ASTM E84)
Water Resistance	Excellent
Mildew Resistance	Excellent
VOC	471 g/l
Freeze/Thaw Stability	Passed 5 cycles
Flammability	Flammable when wet Non-flammable when dry

APPLICATION

Temperature	35°F – 110°F (1.7°C – 44°C)
Method	Brush, rolled or spray applied
Preparation	Surface must be dry and free of dirt, oil and grease.
Clean Up	UN-TACK™ or solvent or mineral spirits (Use safe handling practices.)

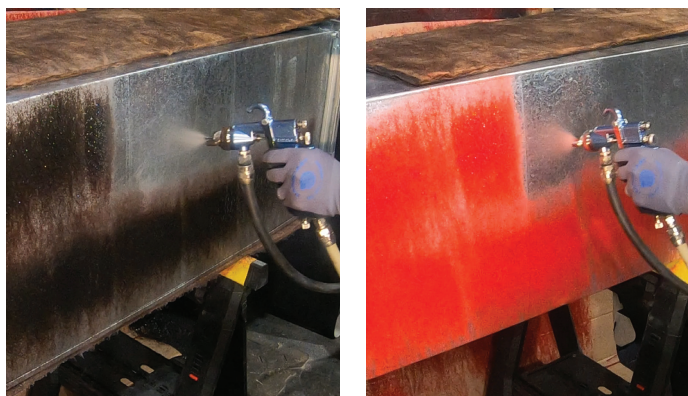
PRECAUTIONS

Keep away from sparks and open flame. May cause flash fire. Vapors are heavier than air and may travel to a distant ignition source. Contains heptane, toluene and acetone solvents. Harmful if swallowed or inhaled. May cause eye irritation. Keep out of the reach of children. Review Safety Data Sheet for complete safety information prior to use.

For Industrial Professional Use Only.

STORAGE

Temperature	35°F – 110°F (1.7°C – 44°C) DO NOT FREEZE
Shelf Life	One year (unopened)
Flammability	Extremely flammable. Store according to code.

LEED

Post-industrial Recycled Content	0%
Pre-consumer Recycled Content	0%
VOC Content	471 g/L
Manufacturing Location(s)	Wylie, TX