


90 Degree Standard Radius (1-1/2" Centerline)



Low pressure and friction loss. Meets SMACNA gauge requirements. Airtight 4-ply lock seam construction. Meets leakage Class 3 for 10" W.G. Duct construction class in a sample test section. Sealant is required only where elbows attach to the duct, saving labor time. Greater structural integrity. 26 ga Galvanized Steel

DIMENSIONS			
(A)	(B)	(C)	Weight
4"	6"	2"	1.2 lbs
5"	7-1/2"	2-3/16"	1.81 lbs
6"	9"	2-3/8"	2.56 lbs
7"	10-1/2"	2-9/16"	3.31 lbs
8"	12"	2-3/4"	4.17 lbs
9"	13-1/2"	2-15/16"	5.12 lbs
10"	15"	3-1/8"	6.15 lbs
12"	18"	3-9/16"	8.95 lbs
14"	21"	3-15/16"	11.77 lbs

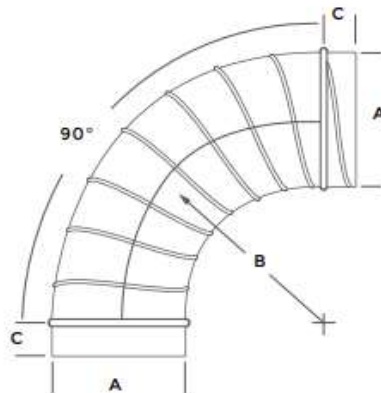

KEY:
 $B/A = 1.5"$
 B = Centerline Radius
 A = Diameter