

PIPES AND CONNECTORS

1.2

Conductor Pipe

Description

Metal Zinc's conductor pipe is available in 3", 4" and 5" inner diameters and manufactured at 10' lengths.

Manufactured in 26 and 30-gauge constructions.

Commonly used for dryer vents, fresh air intakes, bathroom exhaust, non-commercial kitchen range hood exhausts and other HVAC exhaust applications.



Features

Crimped on one end allowing installations of fittings or additional sections of pipe for longer runs.

Both ends of pipe are covered to keep the external environment from contaminating the interior in compliance with LEED requirements.

Longitudinal seam eliminates use of additional duct sealer.

Standard Construction

Galvanized steel complying with ASTM A525

Sold in pallet quantities


Optional Construction

Aluminum

Galvalume

Galvanneal (paint grip)

Stainless steel 304 & 316

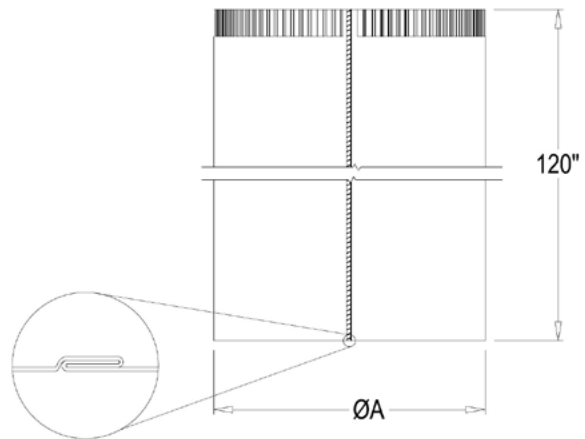

Packaging

Metal Zinc Part Number	Gauge	Size A Inches	Pallet Quantity
26-3-COND-P	26	3	224
26-4-COND-P	26	4	120
26-5-COND-P	26	5	72
30-3-COND-P	30	3	224
30-4-COND-P	30	4	120