

Loop End Fixing



The suspension of HVAC, Mechanical, Lighting & Electrical services in an indoor stationary setting.
NOT suitable for use in chlorinated / swimming pool environments.

APPLICATION / MATERIAL SPECS

For choking around bar joists, purlins, beams, roof trusses, strut, and other accessible building features.

MATERIAL

Cable: Galvanized high tensile steel cable to EN12385. Standard lengths from 5ft-30ft, other lengths can be made to order.

	No. 1	No. 2	No. 3	No.4	No.5
Cable Dia. (in.)	1/16"	5/64"	1/8"	3/16"	1/4"
Strand configuration	7x7	7x7	7x7	7x19	7x19

Crimp/Ferrule: Aluminum


*** Refer to fastener load ratings and safety factors.**

LOOP

Cable with crimped Loop*




SIZE SPECS

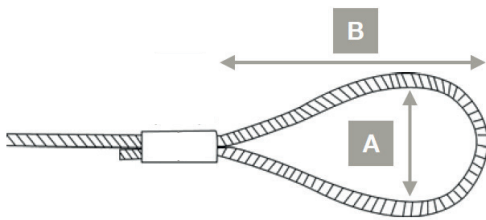


Size	A (in.) (approx.)	B (in.) (approx.)
No. 1	1 3/16"	2 3/8"
No. 2	1 3/16"	2 3/8"
No. 3	1 3/16"	2 3/8"
No. 4	1 3/4"	3 1/4"
No. 5	1 3/4"	3 1/2"


APPLICATION EXAMPLES




Spiral Duct, Small
Choke




Rectangular Duct
with Duct Trapeze Fastener




Ceiling Attachment
with Ceiling Clip



Spiral Duct, Large
Cradle



Rectangular Duct
with UniGrip Fastener



Light Fixture
with V-Bracket

PI-LOOP-US

www.gripple.com

Gripple's policy is one of continuous development and innovation.
We therefore reserve the right to alter specifications, etc. without notice.



Gripple Inc | 1611 Emily Lane | Aurora, IL 60502 | USA

Tel +1 866 474 7753 Fax +1 800 654 0689 Email grippleinc@gripple.com