

# QT Universal Clamp




Used in conjunction with Grippler Brackets to provide quick and easy pipework installation.

## FEATURES / BENEFITS

- **Quick** – up to ten times faster than traditional methods due to integral mounting pillar and quarter turn attachment to Universal Bracket
- **Simple** – no tools required for installation
- **Universal** – replaces over 13 different pipe rings from 15 mm copper to 6" steel
- **Robust** – retractable sleeve, pre-fitted to wire rope to prevent galvanic corrosion
- **Versatile** – a variety of rubber pads provide insulation against vibration (noise reduction > 23 db)
- **Strong** – 75 kg SWL with a 3:1 safety factor
- **Compatible** – available with Kooltherm/Armaflex pipe collars for insulated pipes
- **Safe** – supplied in ready-to-use kits with Grippler Brackets for easy site storage and waste reduction




## INSTALLATION

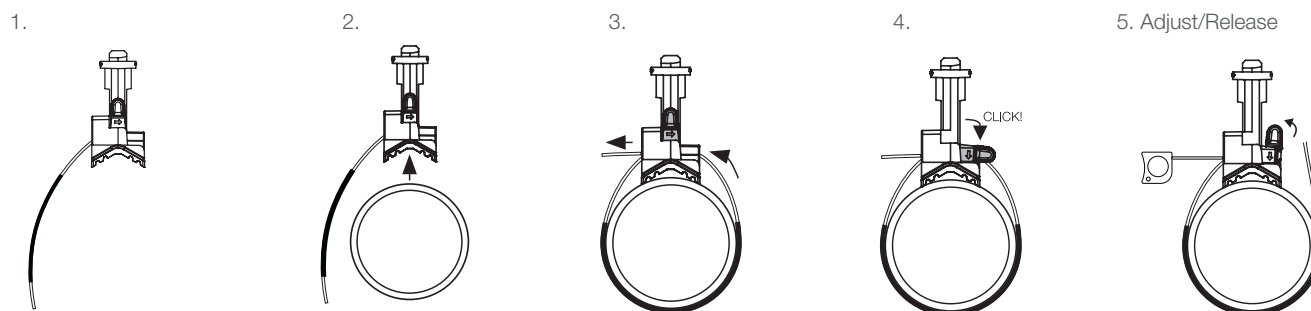


\*Initial installation may require the use of a tool

## SPECIFICATION

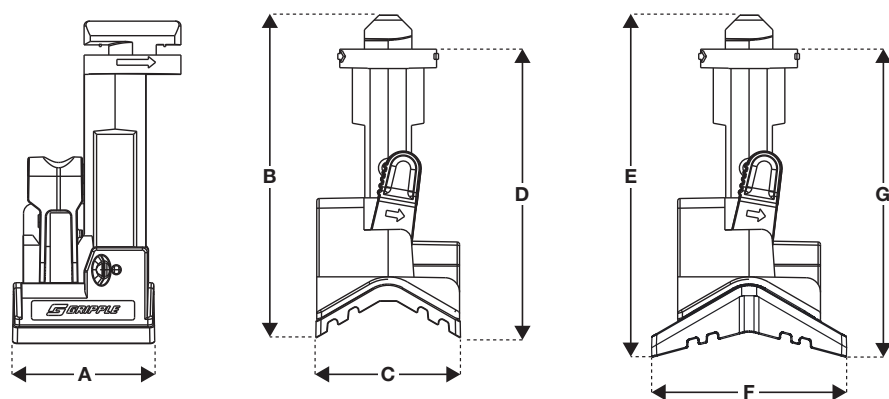

Dimension	Size (mm)
A	29.5
B	68.5
C	30
D	52
E (Large Pad)	73.5
F (Large Pad)	40
G (Large Pad)	57

## AVAILABLE BRACKETS

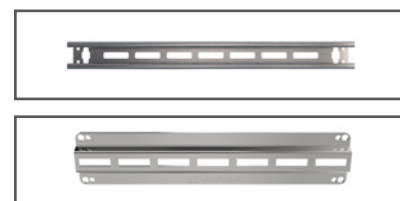

Brackets are available in multiple sizes. For more information please contact us or visit [www.grippler.com](http://www.grippler.com)

## SUBMITTAL INFORMATION

**Load Rating:**  
75 kg @ 3:1 safety factor

**Material:**  
**Housing** - Type ZA2 Zinc  
**Wedge** - Sintered steel hardened to min. 56 Rockwell C  
**Spring** - Stainless Steel (Type 302)  
**Pad** - EPDM (40 Shore A)

**Approvals:**  
 Lloyds certified  
 TUV tested  
 APAVE tested

