

Stud End Fixing



The suspension of HVAC, Mechanical, Lighting & Electrical services in an indoor stationary setting.
NOT suitable for use in chlorinated / swimming pool environments.

APPLICATION / MATERIAL SPECS

Installs into an anchor or internally threaded concrete insert. 1/4" Stud works with a 1/4" anchor. 3/8" Stud works with a 3/8" anchor. 1/4" Stud is available with a 1" or 2" thread.

MATERIAL

Cable: Galvanized high tensile steel cable to EN12385. Standard lengths from 5ft-30ft, other lengths can be made to order.

	No. 1	No. 2	No. 3	No.4
Cable Dia. (in.)	1/16"	5/64"	1/8"	3/16"
Strand configuration	7x7	7x7	7x7	7x19

Stud: Zinc plated steel


STUD

Cable with crimped
1/4"-20 or
3/8"-16 Stud*



* Refer to fastener load ratings and safety factors.

SIZE SPECS

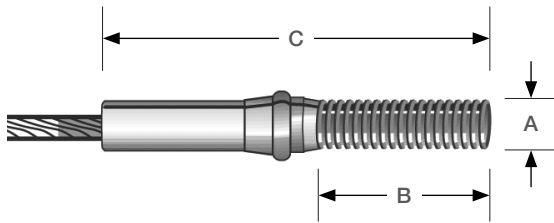


Size	A (in.)	B (in.)	C (in.)
No. 1	1/4"	1"	2"
No.2	1/4"	1"	2"
	3/8"	1 7/8"	2 3/4"
No.3	1/4"	1"	2"
	3/8"	1 3/4"	3 3/4"
No.4	3/8"	1 3/4"	3 3/4"

APPLICATION EXAMPLES



Spiral Duct
Stud Up



Rectangular Duct
Double Stud Up

INSTALLATION TOOL



The Telescoping Install Pole allows you to more easily install the Stud from the ground

PI-STUD-US
Digital SEP 2022

www.gripple.com

Gripple's policy is one of continuous development and innovation.
We therefore reserve the right to alter specifications, etc. without notice.



Gripple Inc | 1611 Emily Lane | Aurora, IL 60502 | USA

Tel +1 866 474 7753 Fax +1 800 654 0689 Email grippleinc@gripple.com