

# Toggle End Fixing



The suspension of HVAC, Mechanical, Plumbing, Lighting & Electrical services in an indoor stationary setting.  
NOT suitable for use in chlorinated / swimming pool environments.

## APPLICATION / MATERIAL SPECS

Inserts into specific hole diameters of light fixtures, metal decking, and other pre-drilled structures or services. Toggle sizes available to fit 1/4", 5/16", and 13/32" hole sizes.

### MATERIAL

**Cable:** Galvanized high tensile steel cable to EN12385.  
Standard lengths from 5ft-30ft, other lengths can be made to order.

	No. 1	No. 2	No. 3
Cable Dia. (in.)	1/16"	5/64"	1/8"
Strand configuration	7x7	7x7	7x7

**Toggle Plate & End Stop:** Zinc Plated Steel


## TOGGLE

Cable with end stop and Toggle plate\*





\* Refer to fastener load ratings and safety factors.

## SIZE SPECS

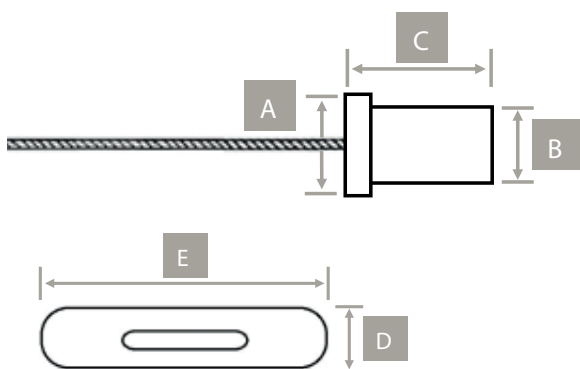

Size	A (in.)	B (in.)	C (in.)	D (in.)	E (in.)
No. 1	1/4"	5/32"	5/16"	7/32"	1 9/16"
No. 2	5/16" (TG)	1/4"	15/32"	5/16"	1 9/16"
	1/4" (TQG)	1/4"	15/32"	1/4"	1 9/16"
No. 3	3/8"	1/4"	3/4"	3/8"	2"

## APPLICATION EXAMPLES

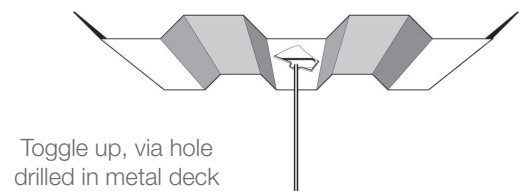

PI-TOGGLE-US  
Digital AUG 2022

[www.gripple.com](http://www.gripple.com)

Gripple's policy is one of continuous development and innovation.  
We therefore reserve the right to alter specifications, etc. without notice.



Gripple Inc | 1611 Emily Lane | Aurora, IL 60502 | USA

Tel +1 866 474 7753 Fax +1 800 654 0689 Email [grippleinc@gripple.com](mailto:grippleinc@gripple.com)