

# Trapeze Bracket



For the suspension of regular ductwork or similar services in an indoor stationary setting.

## APPLICATION

- Replaces use of hanger strap for suspension of rectangular ductwork.
- Works in conjunction with Gripple's No.2 & No.3 UniGrip Fastener (i.e. UniGrip Fastener and length of cable with pre-attached end fixing).
- Trapeze Bracket attach easily to each side of the ductwork with 3/4" #10 self-drilling screws at four points

## LOAD RATING

3:1 Safety factor

## MATERIAL SPECIFICATION

Manufactured from 14 gauge galvanized steel.  
Galvanized finish to ASTM-A123 standards

## TRAPEZE BRACKET




### Size:

For use with No.2 & No.3 UniGrip

### Max. Safe Working Load:


No. 2 - 120 lbs

No. 3 - 240 lbs

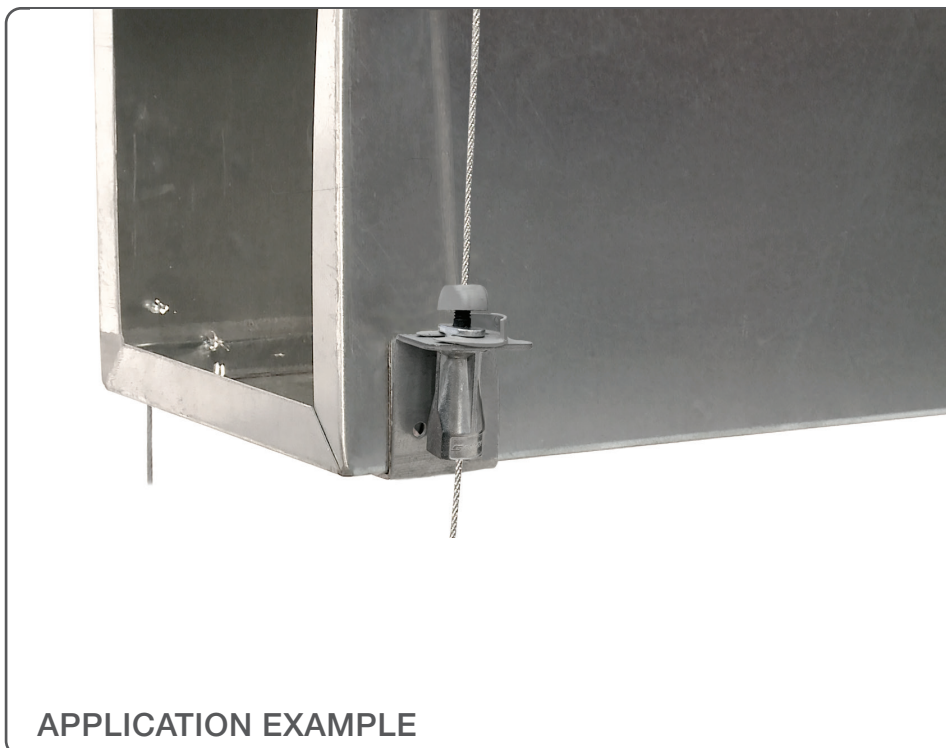

## APPLICATION EXAMPLE

## AVAILABLE END FIXINGS

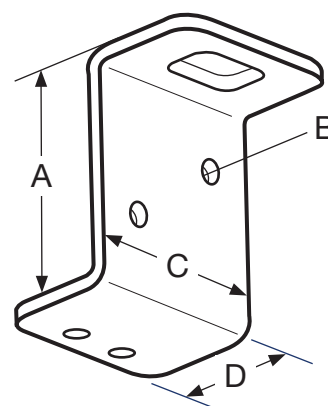

A (in.)	B (in.)	C (in.)	D (in.)
1 57/64	7/32	1 1/2	1

PI-TRAPEZE-BRACKET-US  
Digital SEP 2022

[www.gripple.com](http://www.gripple.com)

Gripple's policy is one of continuous development and innovation.  
We therefore reserve the right to alter specifications, etc. without notice.



Gripple Inc | 1611 Emily Lane | Aurora, IL 60502 | USA  
Tel +1 866 474 7753 Fax +1 800 654 0689 Email [grippleinc@gripple.com](mailto:grippleinc@gripple.com)