

The next generation of cable suspension products designed for the fast suspension of pipework, ductwork, HVAC systems and modules including multi-tier installations.

UNIGRIP FEATURES / BENEFITS


- **Quick** – up to 6 times faster than traditional suspension systems
- **Safe** – can be pre-installed to channel using pre-fitted washer/nut or using retention clip, reducing time working at height
- **Easy** – integral ergonomically designed release button allows for simple adjustment
- **Secure** – button acts as a locking screw and indicator clearly highlights the cable is locked in position for ultimate security
- **Versatile** – variety of foot attachments available to suit applications

FOOT FEATURES

- Male thread for mechanical fixing
- Supplied with either a square washer and channel nut or hex nut
- Thread sizes - 3/8" (UniGrip #2), 3/8" (UniGrip #3) and 1/2" (UniGrip #4)




INSTALLATION

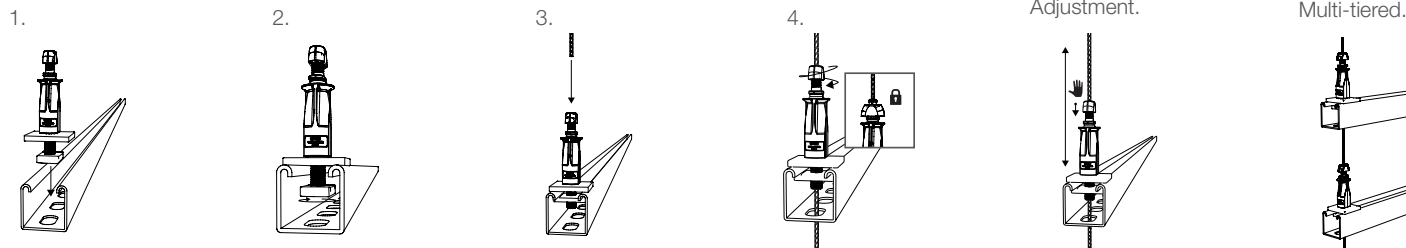

SPECIFICATION

NOT suitable for use in chlorinated / swimming pool environments

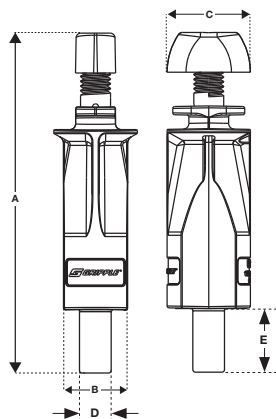

No.2	Dimension	A	B	C	D	E
	Inches	3.16	0.66	0.78	0.375	1.00
No.3	Dimension	A	B	C	D	E
	Inches	3.89	0.66	0.86	0.375	1.00
No.4	Dimension	A	B	C	D	E
	Inches	4.50	0.86	1.18	0.50	1.25

Foot Material Thread – Mild Steel (Type EN1A) - Bright Zinc Plated

Maximum off axis suspension = 15° (Unless otherwise specified by Gripple Technical Services).

Maximum torque value to be applied, No. 2 and No. 3 = 4 lb.-ft (5Nm), No. 4 = 18lb.-ft (25Nm)

AVAILABLE END FIXINGS



For more options on available end fixings please contact us or visit www.gripple.com

SUBMITTAL INFORMATION

Load Rating:

No.2 - 120 lbs @ 5:1

No.3 - 240 lbs @ 5:1

No.4 - 550 lbs @ 5:1

Material:

Housing - Type ZA2 Zinc

Carriage - Acetal Copolymer

Wedge - Sintered steel

Button - Acetal Copolymer

