


The LSHT5 Liner Sizer will help size and cut duct liner more efficiently than ever thought possible with a hand operated machine. Economical & designed to cut fiberglass insulation.

LSHT5

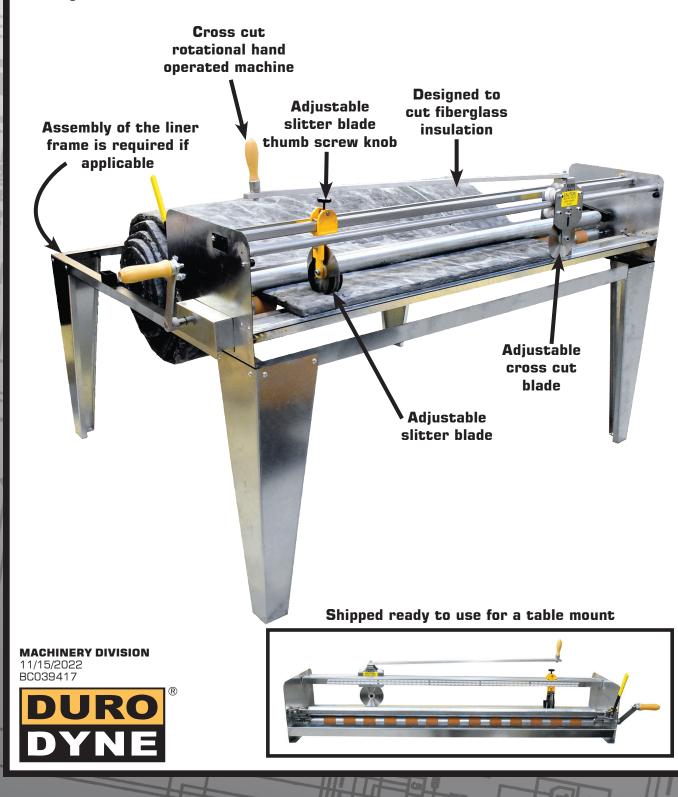

INCREASES PRODUCTIVITY

The LSHT5 allows you to both slit and cut insulation efficiently and accurately. By rotating a crank handle, the liner is quickly fed through the machine. This handle has a direct chain drive for easy operation. Also, Duro Dyne has built into the LSHT5 a quick release handle that allows the operator to remove or reposition the uncut material using one or both hands.

SELF ADJUSTING

Automatically, the LSHT5 accommodates material that varies in thickness from 1/2" to 2". No time consuming manual adjustments are necessary. Just feed in the liner. You are ready for production.

EASILY ADAPTABLE TO SHOP LAYOUT

Cross cutting insulation can be done from either side due to a swivel mounted 36" long handle.

RELIABILITY

The LSHT5 is manufactured by skilled mechanics, utilizing the latest production techniques. Each unit has been rigorously tested prior to packaging and shipment in order to insure trouble-free operation. Duro Dyne distributors and sales engineers are available throughout the country to provide continuing service.

OPERATION

The liner easily feeds through rollers by rotating a hand crank operable on either side of machine. A slitting blade provides accurate clean cuts of desired widths.

Cross cutting is provided by a transverse rotary cutting blade which the operator draws across the liner from either side of machine. The handle rotates 360° to swing out of the way when not in use.

The machine head can be mounted and used on your own table, or can be used with the supplied Duro Dyne frame. This frame not only supports the head but also can accommodate one roll of insulation, (up to 60" wide and 40" in diameter), that can be preloaded onto the built-in reel for continuous, productive operation.

CAPACITY

Roll Width	Roll Diameter	Liner Thickness	Liner Density	Slitters
Up to 60"	Up to 40"	1/2" through 2"	1- ¹ / ₂ to 6 lbs. density	Up to 5

SPECIFICATIONS

621/2" Long; 82" Wide; 52" High Blades 6" Diameter Carbon Steel Exit Table Not Supplied

SHIPPING WEIGHT

280 lbs. Approx.

ORDERING INFORMATION

ltem #	Code	Description	
27189	LSHT5	LSHT5 Liner Sizer	
28009	LSB	Replacement Blade Only	
The LSHT5 is shipped ready to use for a table mount. Assembly of the frame is required if applicable.			

Duro Dyne East Division, Bay Shore, NY 631-249-9000 Fax: 631-249-8346 Duro Dyne Midwest Division, Hamilton, OH 513-870-6000 Fax: 513-870-6005 Duro Dyne West Division, Longmont, CO 562-926-1774 Fax: 562-926-5778 Duro Dyne Canada, Lachine, Quebec, Canada 514-422-9760 Fax: 514-636-0328 www.durodyne.com E-mail: durodyne@durodyne.com